


LRD

BoPP white voided film, wrap around label, both sides high gloss, high yield, treated

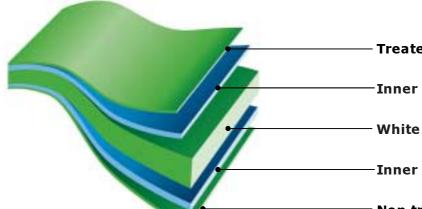

Treated layer

Inner OPP layer

White voided OPP core

Inner OPP layer

Non treated layer

PROPERTIES

- High yield
- White pearlescent high gloss appearance on both sides
- Consistent slip

TYPICAL APPLICATIONS

- Wrap around label (WAL): reel fed technology
- Rotogravure, flexographic, off-set or UV printing
- High print definition, premium print

ROLL STZF AVATLABILITY*

ROLL SILL AVAILABILITY				
Film	Standard Length (m)	4x ** (m)	7x (m)	
LRD 35	1,800	7,200	12,600	
LRD 40	1,550	6,200	10,850	
Outside diameter – core 76 mm	305 mm	588 mm		
Outside diameter - core 152 mm	337 mm	605 mm	783 mm	

^{*}Regional availability of roll sizes (multiples of standard length)-please refer to the corresponding Sales Representative

^{**}Length rolls on 152 mm cores will be produced with reduced length in Europe to maintain roll diameters below 600 mm



Properties	Method	Unit	Ref.	Typical	values
Nominal thickness		μm		35	40
Unit weight	Internal method	g/m²		26.0	29.5
Yield		m²/kg		38.5	33.9
Tensile strength	ACTM DOOR	N/mm²	MD TD	100 200	
Elongation at break	ASTM D882	%	MD TD	130 45	
Light transmission	ASTM D1003	%		26	23
Gloss (45°)	ASTM D2457	Gloss Unit		85	
Dynamic cof	ASTM D1894		NT/NT	0.	25
Thermal shrinkage	OPMA TC4(a)	%	MD TD		.0 .0
Treatment level	ASTM D2578	mN/m		3	8

Tolerance					
	≤ 1.000 kg	± 20%			
Weight	1.001-10.000 kg	± 10%			
	> 10.000 kg	± 5%			

STORAGE, HANDLING AND APPLICATION

LRD does not require special storage conditions. A storage temperature below 30°C is recommended in order to minimise the deterioration of the film properties in general. It is advisable to turn over the inventory according to the delivery date (first in-first out). The film should be conditioned in the operating environment at least for 24 hours before processing. LRD is suitable for use up to 6 months from the date of production.

INDICATION OF SURFACE TREATMENT

LRD is usually supplied with treatment on the outside surface (TO).

LRD can be supplied with treatment on the inside surface (TI). This must be agreed with our sales representative before processing the order.

FOOD CONTACT

LRD complies with EC and FDA regulations. Specific documents and MSDS are available on request.

The property values represented in the table do not constitute product specifications, but represent the average or typical values. Use of this information is limited to the specific recipient. While the information is accurate to the best of our knowledge as of the date compiled, it is limited to the information as specified. No representation or warranty, expressed or implied, is made regarding the information, or its completeness or fitness to a particular use. The user is solely responsible for all determinations regarding use and we disclaim liability for any loss or damage that may occur from the use of this information. Ti does not guarantee the typical (or other) values.